TALLIN 600 **0661** sku 1116002

astro



PRODUCT SPECIFICATION

GENERAL

FINISH:	Polished Chrome	CABLE LENGTH:	Not Applicable
MAIN MATERIAL:	Metal - Aluminium	GROSS WEIGHT:	1.775 (kg)
DIMENSIONS:	H: 40mm W: 600mm D: 80mm	CLASS:	CE (Class II)
INSTALLATION ORIENTATION:	Wall Mount	IP RATING:	IP44
CUT OUT HOLE:	Not Applicable	BATHROOM ZONE:	Zone 2, 3
RECESS DEPTH:	Not Applicable	VOLTAGE:	Mains 230V
FIRE RATING:	Not Applicable	PRODUCT F MARK:	Suitable for mounting on flammable materia
LAMP			
LIGHT SOURCE:	T5 HO	MACADAM ELIPSE:	Not Applicable
MAXIMUM WATTAGE:	24W	UGR:	Not Applicable
MAXIMUM LAMP LENGTH:	Not Applicable	BEAM ANGLE:	Not Applicable
LAMP INCLUDED?	No	TILT ADJUSTMENT ANGLE:	Not Applicable
LUMINOUS FLUX:	727.7 (lm)	ROTATION ADJUSTMENT ANGLE:	Not Applicable
COLOUR TEMP:	Lamp Dependent	AVERAGE LIFESPAN:	19,000 (Hrs)
CRI:	80	L70:	To Be Advised
R9:	-5.3		
ELECTRICAL			
SWITCHED:	No	SUPPLY FREQUENCY:	50/60 (Hz)
DIMMABLE:	No	DRIVER / BALLAST VOLTAGE:	220-240 (V)
DIMMING METHOD:	Not Applicable	DRIVER AVERAGE LIFESPAN:	Not Applicable
DRIVER OUTPUT CURRENT:	Not Applicable	EFFICACY:	32.8 (Im/W)
DRIVER OUTPUT VOLTAGE:	Not Applicable	DRIVER/BALLAST INCLUDED?	Yes (Integral)

ADDITIONAL INFORMATION





This product is not suitable for use with a PIR motion detector.



BOX QUANTITY X4

Œ

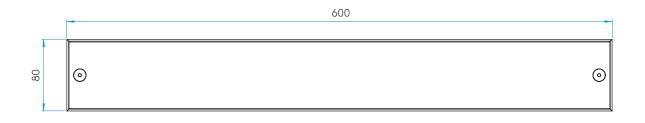

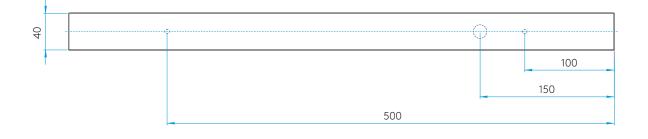

Astro Lighting Ltd. G2 River Way, Harlow, CM20 2DP, Great Britain T: +44 (0) 1279 427001 F: +44 (0) 1279 427002 sales@astrolighting.co.uk www.astrolighting.co.uk